

# Configure ERSPAN with VMware

Published: 2021-10-21

The Encapsulated Remote Switched Port Analyzer (ERSPAN) enables you to monitor traffic on multiple network interfaces or VLANs and then send the monitored traffic to one or more destinations. The ExtraHop system supports the VMware Encapsulated Remote Mirroring Source packet mirror feature, an ERSPAN-like capability.

The following procedures explain how to configure an interface on the ExtraHop system to receive ERSPAN traffic and how to configure the VMware server with the vSphere Web Client.

For more information about configuring networking on the ExtraHop system, see the [ExtraHop Admin UI Guide](#).

For more information about configuring the VMware vSphere server, see [Working with Port Mirroring](#) in the VMware documentation.

## Configure the ExtraHop interface settings

1. Log in to the Administration settings on the ExtraHop system through `https://<extrahop-hostname-or-IP-address>/admin`.
2. In the Network Settings, click **Connectivity**.
3. In the Interfaces section, click **Interface 1**.



**Note:** If you select **Interface 1** for management and **Interface 2** for ERSPAN, you cannot configure both interfaces on the same subnet.


4. Select **Management Port + RPCAP/ERSPAN/VXLAN Target** from the **Interface Mode** drop-down list.
5. Complete the remaining fields and then click **Save**.
6. Optional: Depending on your configuration, configure or disable the remaining interfaces.



**Note:** For more information about setting up network interfaces, see the [Connectivity](#) section in the ExtraHop Administration Guide.

## Configure port mirroring on the vSphere server

1. Log in to the vSphere Web Client and select the vSphere distributed switch (VDS) from which you want to monitor traffic.
2. Click the **Settings** tab.
3. In the Settings section, click **Port Mirroring**.

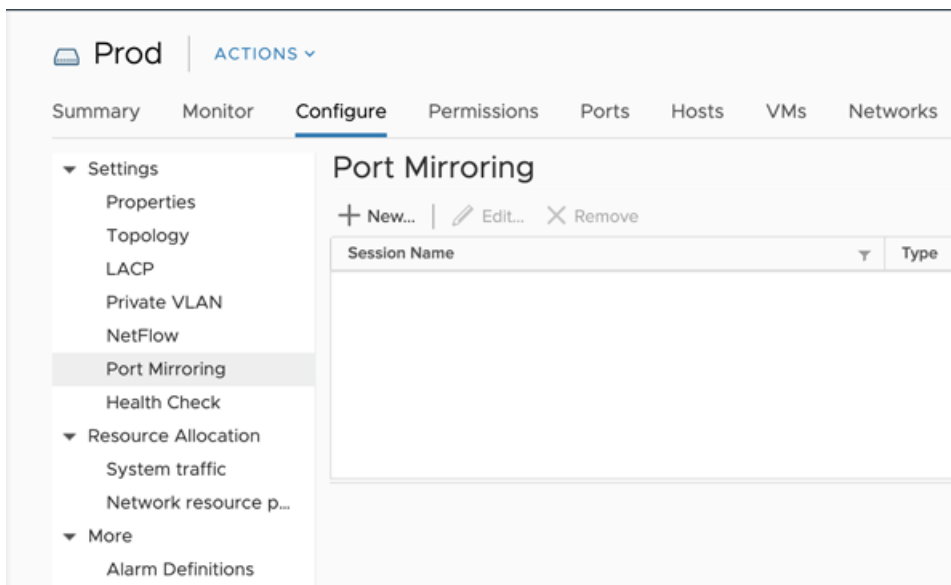


4. Click **New...** to create a port mirroring session to mirror vSphere distributed switch traffic to specific physical switch ports.



**Tip:** For detailed information about creating a port mirroring session, see your vSphere documentation.

- a) In the Select session type section, select **Encapsulated Remote Mirroring (L3) Source** and click **Next**.

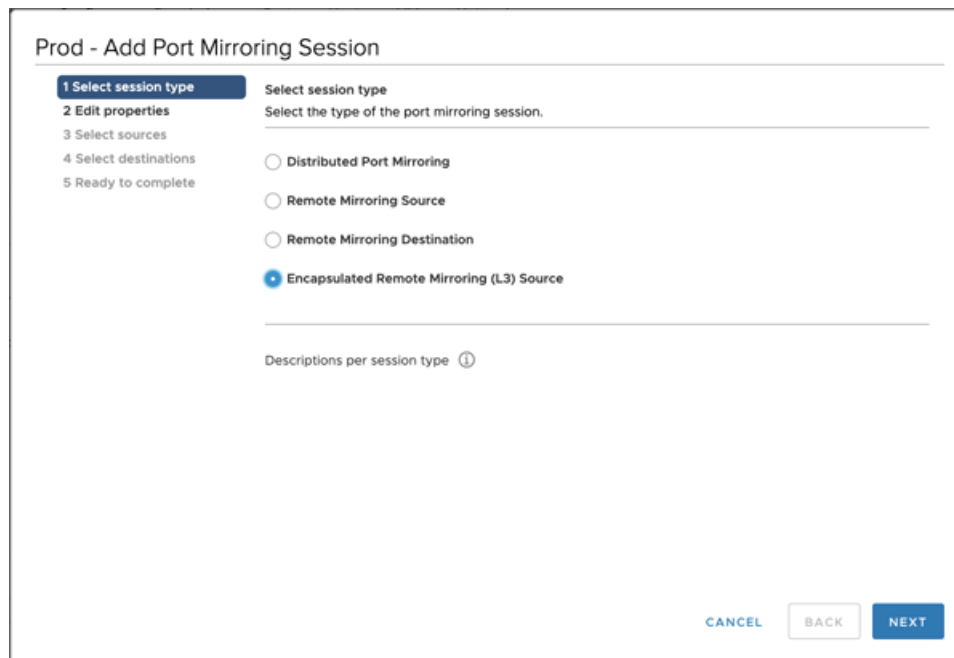

- b) In the **Edit properties** section, configure the following settings:

- **Name:** Specify the name.
- **Status:** Select **Enabled** from the drop-down list.
- **Encapsulation type:** Select **ERSPAN Type II** from the drop-down list



**Note:** GRE is a supported encapsulation type; however, you must configure [Network Overlay Decapsulation](#) for NVGRE on the sensor.

### Prod - Add Port Mirroring Session

1 Select session type

**2 Edit properties**

3 Select sources

4 Select destinations

5 Ready to complete

**Edit properties**  
Specify a name and the properties of the port mirroring session.

Name: Session 0

Status: Enabled

Session type: Encapsulated Remote Mirroring (L3) Source  
GRE  
**ERSPAN Type II**  
ERSPAN Type III

Encapsulation type: [dropdown]

Session ID: 0

**Advanced properties**

Mirrored packet length:  Enable 60

Sampling rate: 1

Description: [text area]

CANCEL BACK NEXT

c) Click **Next**.

d) In the Select Ports section, select virtual ports to include in this mirror.

**Warning:** Do not include any VMkernel (vmk) ports, any ports connected to the virtual Reveal(x) sensor, or any ports that might be carrying the ERSPAN data created by this mirror. Adding these ports will compound the traffic destined for the sensor, and disrupt the networking capabilities of the dvSwitch, and any hosts or interfaces participating in the dvSwitch will become permanently unavailable.

### Select Ports

<input checked="" type="checkbox"/>	Port ID	Port Name	Connected Entity	Host	Runtime MAC Addr...	Port Group Name	P
<input checked="" type="checkbox"/>	0	--	mike-linu-3	mike-esxi-4.ad...	--	Core	
<input checked="" type="checkbox"/>	1	--	PAN_Migrati...	mike-esxi-4.ad...	--	Core	
<input type="checkbox"/>	14	--	vmk1	mike-esxi-3.ad...	00:50:56:69:dc:ba	NFS	
<input checked="" type="checkbox"/>	164	--	mike-pavm-a	mike-esxi-4.ad...	--	traps-5-user	
<input checked="" type="checkbox"/>	2	--	mike-serv-2	mike-esxi-4.ad...	00:50:56:b5:1f:40	Core	
<input checked="" type="checkbox"/>	204	--	mike-pavm-a	mike-esxi-4.ad...	--	Demo	
<input checked="" type="checkbox"/>	205	--	mike-wtst-1	mike-esxi-3.ad...	--	Demo	
<input checked="" type="checkbox"/>	206	--	mike-wtst-2	mike-esxi-3.ad...	--	Demo	
<input checked="" type="checkbox"/>	207	--	mike-kali-1	mike-esxi-3.ad...	--	Demo	
<input checked="" type="checkbox"/>	208	--	CbArtifactKit	mike-esxi-3.ad...	--	Demo	
<input checked="" type="checkbox"/>	209	--	test-esxi-1	mike-esxi-4.ad...	--	Demo	

CANCEL OK

e) Click **Next**.

f) In the Select destinations section, click the plus sign (+) to add the IP address or addresses that should receive the mirrored traffic.

### Prod - Add Port Mirroring Session

- ✓ 1 Select session type
- ✓ 2 Edit properties
- ✓ 3 Select sources
- 4 Select destinations**
- 5 Ready to complete

**Select destinations**  
Select the destination ports and the uplinks of the port mirroring session.

+ ×

IP Address

10.75.1.127

CANCEL BACK NEXT

g) In the Ready to complete section, verify the settings and then click **Finish**.

### Prod - Add Port Mirroring Session

- ✓ 1 Select session type
- ✓ 2 Edit properties
- ✓ 3 Select sources
- ✓ 4 Select destinations
- 5 Ready to complete**

**Ready to complete**  
Review the settings for the new port mirroring session before finishing the wizard.

<b>Name</b>	Session 0
<b>Status</b>	Enabled
<b>Session type</b>	Encapsulated Remote Mirroring (L3) Source
<b>Encapsulation type</b>	ERSPAN Type II
<b>Session ID</b>	0
<b>Advanced properties</b>	
Sampling rate	Mirror 1 of 1 packets
Number of source ports	84
Destination IP addresses	10.75.1.127
Description	--

CANCEL BACK FINISH

**Tip:** Consider turning off TCP segmentation offloading on the operating systems where the mirrored traffic is coming from.