

Monitor new devices on your network

Published: 2025-01-29

Every new device that connects to your network adds potential risk, so it's important to quickly identify newly-discovered devices and monitor their activity. The ExtraHop system automatically creates a device group for devices discovered in the past day and the past week. However, this device group collects limited metrics by default and isn't visible from your system dashboard.

In this walkthrough, we'll first prioritize the newly-discovered devices group to gather comprehensive metrics, then we'll create a dashboard to monitor device activity, and finally we'll create a daily report to keep track of interesting changes.

After completing this walkthrough, you will be able to answer the following questions:

- How many new devices appeared on my network in the last week?
- How much inbound and outbound traffic is associated with new devices?
- What are the daily changes in new device activity?
- How to learn more when you find interesting device activity?

Prerequisites

- Familiarize yourself with the concepts in this walkthrough by reading the [Device Discovery FAQ](#), [Prioritize groups for Advanced Analysis](#), the [Metrics FAQ](#) and the [Protocol Metrics Reference](#) topics.
- You must have access to a console with system and access administration privileges to schedule a report.

Prioritize new devices for Advanced Analysis

First, we'll prioritize the newly-discovered device group to collect comprehensive metrics through [Advanced Analysis](#). By prioritizing your group for Advanced Analysis, you ensure that the ExtraHop system collects L2-L7 metrics for new devices.


If your console is not [managing analysis priorities](#) for your sensors, you can perform this walkthrough from a sensor instead and omit the final section. (Scheduled reports can only be created from a console.)


1. Log in to the ExtraHop system through `https://<extrahop-hostname-or-IP-address>`.
2. Click the System Settings icon and then click **Analysis Priorities**.
3. In the For Advanced Analysis section, click **adding a group** to add an initial group or **Add Group** to add additional groups.
4. Type `new devices` in the **GROUP** drop-down menu, and then select **New Devices (Last 7 Days)**.
5. At the top of the page, click **Save**.

Now let's create a dashboard to monitor new device activity.

Create a dashboard

By creating a dashboard for your group, you can visualize device activity at a glance.

1. At the top of the page, click **Dashboards**.
2. Click the command menu  in the upper right corner and select **New Dashboard** to create an empty dashboard.
3. Type a name for your dashboard in the **Title** field. For this walkthrough, type `New Devices`.


4. Click **Create**.
When you create a new dashboard, a workspace opens in an editable layout mode. This workspace contains a single region and two empty widgets: a chart and a text box.
5. Delete the text box by completing the following steps:
 - a) Click the command menu  in the upper right corner of the text box widget and select **Delete**.
 - b) Click **Delete Widget**.
Text box widgets can include custom explanatory text about a dashboard or chart. For this walkthrough, however, we won't be adding text.

Next, let's add charts to our dashboard that show which new devices were discovered in the last week and what they did on the network.


Add a chart that shows the traffic throughput for new devices

In this step, we'll create a table that lists all of the devices that were discovered within the last seven days. The amount of incoming and outgoing traffic that was observed over the last week displays next to each device. From this dashboard, you can learn how much traffic each new device is generating.


1. Click the empty chart widget in your newly created dashboard to open the Metric Explorer.
2. Click **Add Source**.
3. In the Sources field, type `New Devices` to filter the results, and then select **New Devices (Last 7 Days)** for a connected sensor.

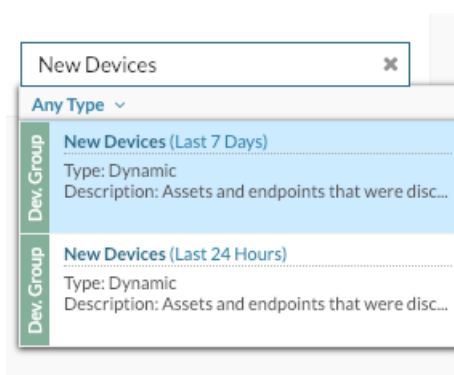


4. In the Metrics field, type `network bytes` to filter results from all of the available metrics, and then click **Network Bytes In**.

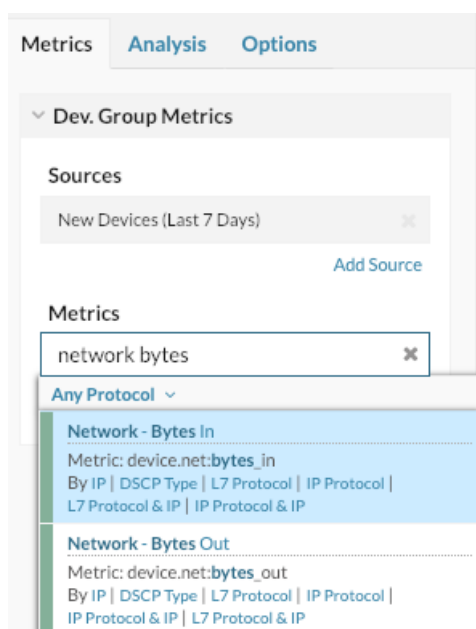

5. Click **Add Metric**, type `network bytes`, and then select **Network Bytes Out**.
6. From the bottom of the window, click **Table**.
7. In the Details section, click **None**, and then click **Group Member**.

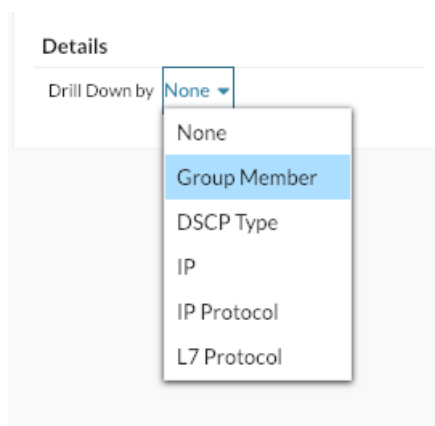


8. Optional: Click the **Options** tab. In the Units section, click **Convert bytes to bits**. The throughput now displays in bits per second.
9. Optional: Below the metric, click **Average Rate** and then click **Count**. The total amount of throughput now displays instead of an average count of throughput per second.
10. In the Top results field, click **5**, type `200`, and then press **Enter**.

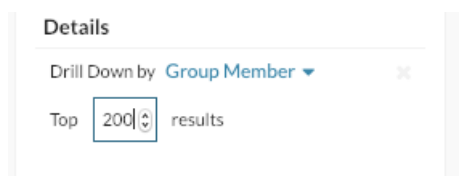

11. Click **Save**.

12. Click **Exit Layout Mode**.

The table now shows all of the newly-discovered devices over the last week and their throughput, as shown

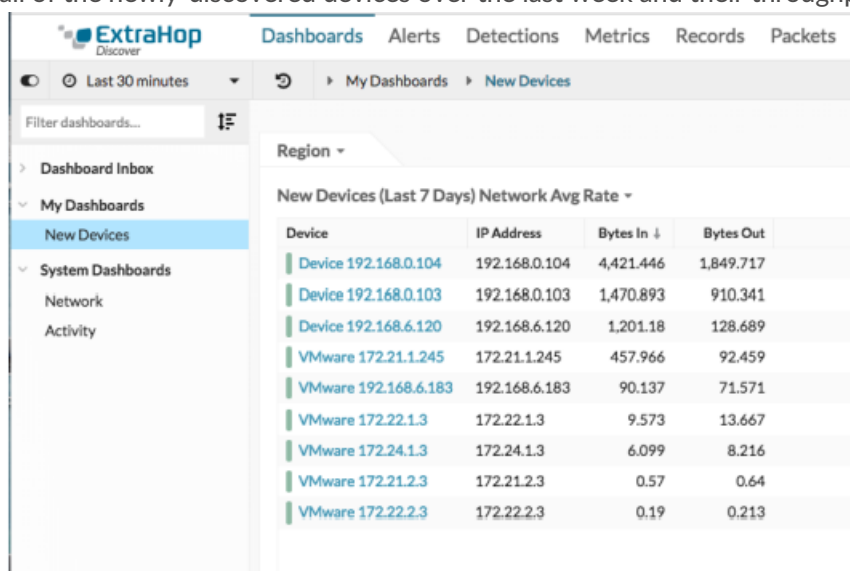

Device	IP Address	Bytes In ↓	Bytes Out
Device 192.168.0.104	192.168.0.104	4,421.446	1,849.717
Device 192.168.0.103	192.168.0.103	1,470.893	910.341
Device 192.168.6.120	192.168.6.120	1,201.18	128.689
VMware 172.21.1.245	172.21.1.245	457.966	92.459
VMware 192.168.6.183	192.168.6.183	90.137	71.571
VMware 172.22.1.3	172.22.1.3	9.573	13.667
VMware 172.24.1.3	172.24.1.3	6.099	8.216
VMware 172.21.2.3	172.21.2.3	0.57	0.64
VMware 172.22.2.3	172.22.2.3	0.19	0.213

in the following figure.

Now, let's set up a daily report to monitor new devices.

Schedule a daily report


After creating your New Devices dashboard, you can schedule a daily report about new device activity over the last day. This report is a PDF file of the dashboard, which can be emailed to any recipient. Scheduled reports can only be created from a console.


In the following steps, we'll show you how to schedule a daily report that runs at 7:00 am.

- From the console, click **Dashboards** at the top of the page, and then click the **New Devices** dashboard in the left pane.



Note: Each report can only link to one dashboard. You can create a report for any dashboard that you own or that has been shared with you.

- In the upper right corner of the dashboard page, click the command menu , and then click **Dashboard Reports**.

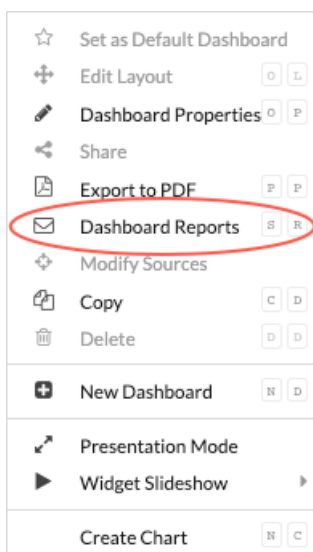

3. A Scheduled Reports page appears that displays all the reports stored on the console. If no reports have been created, this page is empty.
4. In the upper right corner, click **Create**.
5. In the **Report Name** field, the name of the dashboard is displayed, as shown in the following figure.

Create Dashboard Report

Properties

Report Name

New Devices

Description



Owner

Default

Report Contents

Select a dashboard...

Dashboard: New Devices

6. Scroll down to the Time Interval section. Leave the default setting of **Last 1 Days**. The report will include new device traffic that occurred over the course of the previous day.
-  **Note:** For more information about how to configure each field, see [Create a scheduled report](#) .
7. In the Report Frequency section, click in the **At** drop-down menu, and click 07:00 to send a daily email at 7:00am.

Schedule

Time Interval

Last 24 Hours


Report Frequency

☐ Hourly ☒ Daily ☐ Weekly

At 07:00 US/Eastern

Add Schedule



Note: The system time that is set for your console determines the time zone that is displayed when configuring your report. For more information about configuring the time zone for your console through the ExtraHop Administration settings, see [Configure the system time](#) .

8. Type your email address in the Recipients field.

Send Email

Notification Groups

Select an item...

Recipients

sarah@example.com ✕



Note: The ExtraHop system does not store email addresses for ExtraHop user accounts. However, if your ExtraHop RevealX Enterprise system is **configured with an email group**, you can select a notification group to email. RevealX 360 does not support email notification groups.

9. Optional: Click **Send Now** to send a test email to the recipient.
10. Click **Done**. Your scheduled report now appears on the Dashboard Reports page, as shown in the following figure.

Dashboard Reports						
Report Name ▾ = ▾		7 results				
<input type="checkbox"/>	Report ID ↓	Report Name	Owner	Report Contents	Status	Description
<input type="checkbox"/>	22	Active Directory	Default	Active Directory	● Enabled	—
<input type="checkbox"/>	21	System Usage	Default	System Usage	● Enabled	—
<input type="checkbox"/>	20	New Devices	Default	New Devices	● Enabled	—

11. In the bottom right corner of the page, click **Done** again to return to your dashboard.

When you receive the emailed PDF file, click **View report on ExtraHop** to access the dashboard that generated the report. For ExtraHop users, the link opens the console and the dashboard is set to the time interval listed in the report.

In the next section, we'll look at some of the ways you can investigate devices that have unusual activity.

Next steps: Investigate a new device

If you find that a new device is sending a large amount of traffic across your network, you can visit a protocol page to learn what the device is doing.

1. Log in to the ExtraHop system through `https://<extrahop-hostname-or-IP-address>`.
2. At the top of the page, click **Dashboards**.
3. Click the **New Devices** dashboard in the left pane, and then click the device name, as shown in the following figure.

ExtraHop Discover

Dashboards Alerts Detections Metrics Records Packets

Last 30 minutes

My Dashboards New Devices


Filter dashboards...

Region

New Devices (Last 7 Days) Network Avg Rate

Device	IP Address	Bytes In ↓	Bytes Out
Device 192.168.0.103	192.168.0.103	59,245.6...	21,098.018
Device 192.168.0.104	192.168.0.104	8,276.515	2,591.621
VMware 172.21.1.245	172.21.1.245	457.929	92.752
VMware 192.168.6.183	192.168.6.183	122.743	93.274
VMware 172.22.1.3	172.22.1.3	9.107	12.995
VMware 172.24.1.3	172.24.1.3	7.866	10.571
VMware 172.22.2.3	172.22.2.3	0.38	0.427
VMware 172.21.2.3	172.21.2.3	0.38	0.427


A protocol page appears, which contains related metric data for that device.

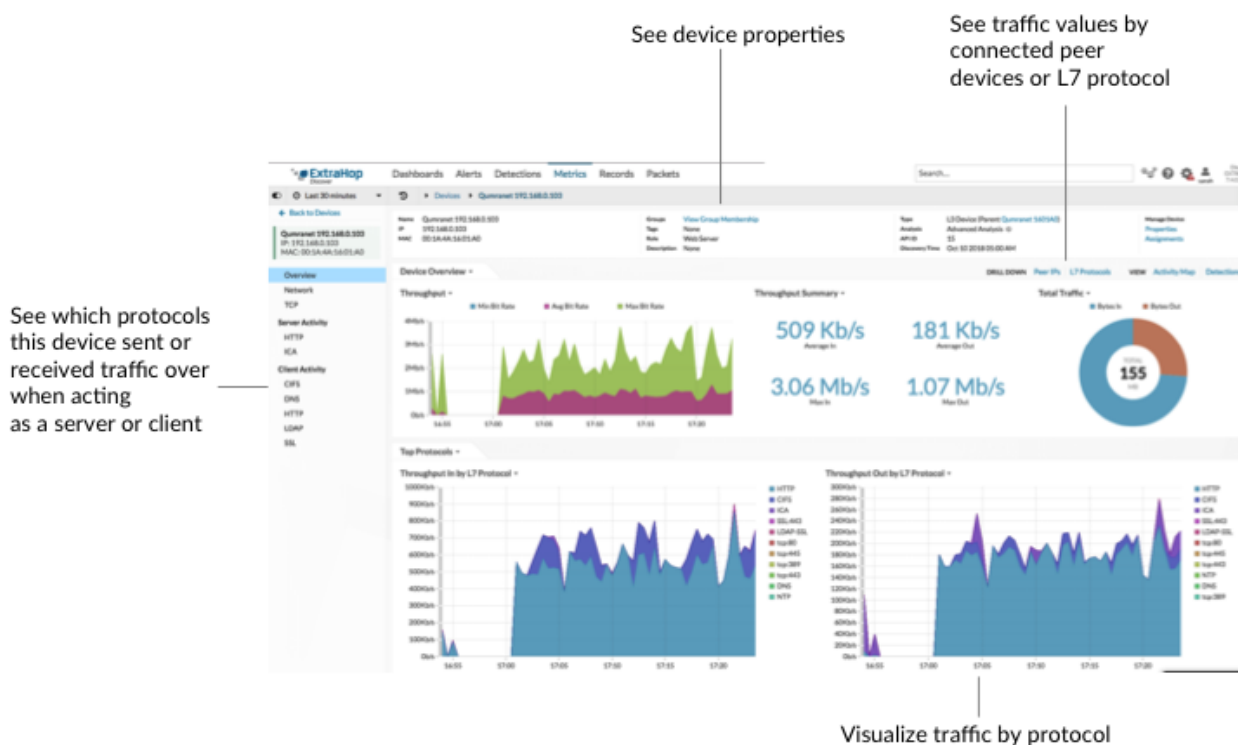

From the protocol page, you can answer the following questions.

What is the primary type of activity for this device?


Look at the charts for Throughput In by L7 Protocol and Throughput Out by L7 Protocol. The traffic volume is broken down by application-level (L7) protocols. In the example below, we can see that HTTP transactions are the primary type of traffic for this device.

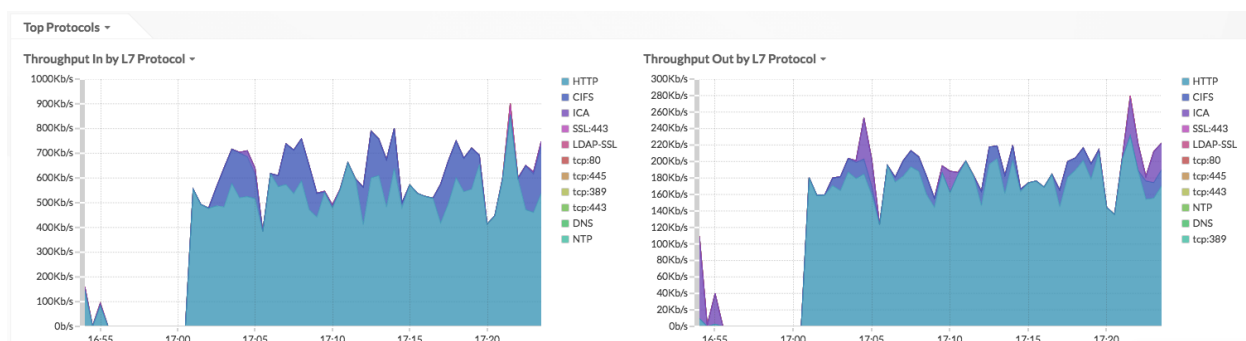


What are the transactions associated with the high amounts of traffic?

If you have a connected recordstore, click a protocol label in the chart, and then click **Records**.

Throughput Out by L7 Protocol -

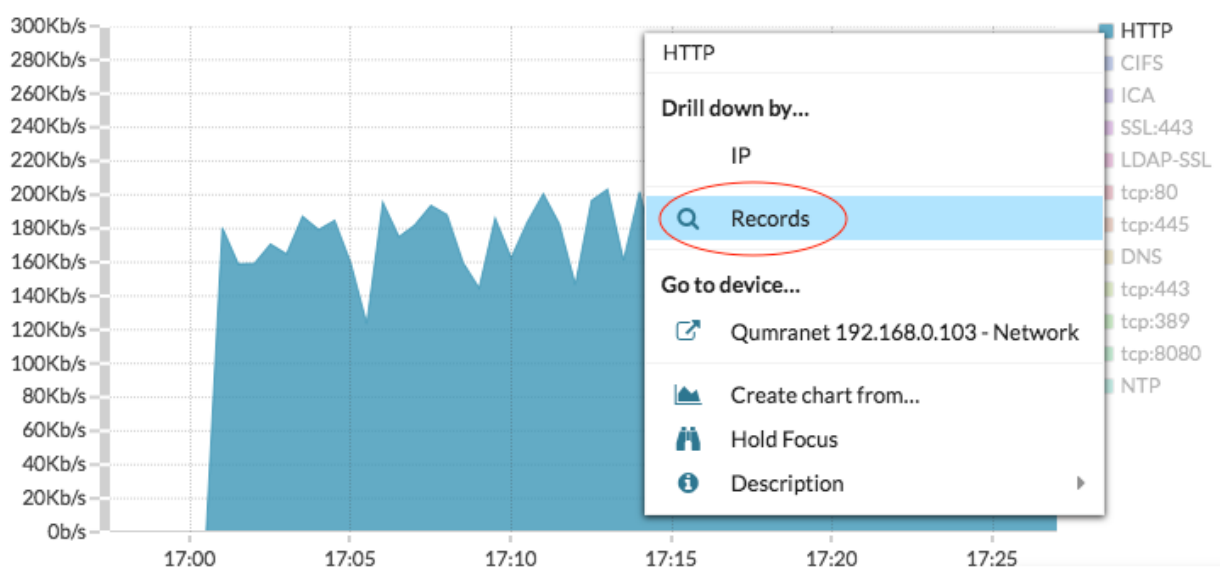

You can see [transaction-level](#) details.

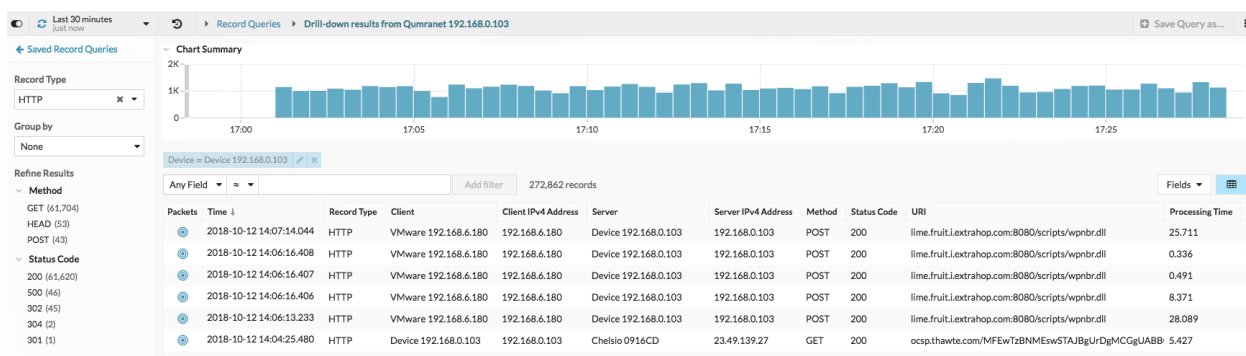

Which peer devices are connected to this new device?

There are two ways to see which network devices are connected to your device.

- In the DRILL DOWN section, click **Peer IPs** to see a list of traffic values by connected peer devices.

Type	L3 Device (Parent Cumranet 1601A0)	Manage Device
Analysis	Advanced Analysis ⓘ	Properties
API ID	15	Assignments
Discovery Time	Oct 10 2018 05:00 AM	

DRILL DOWN

Peer IPs

L7 Protocols

VIEW

Activity Map

Detections

Total Traffic ▾

■ Bytes In

■ Bytes Out

- In the VIEW section, click **Activity Map** [🔗](#) to visualize connections with peer devices by protocol activity.

Manage Device

[Properties](#)

[Assignments](#)

VIEW

Activity Map

Detections

■ Bytes Out