



Connect the Discover and Command appliances to Explore appliances


Published: 2019-02-10

After you deploy an Explore appliance, you must establish a connection from all ExtraHop Discover and Command appliances to the Explore appliance before you can query for stored records.

 **Important:** If you have an Explore cluster of three or more Explore nodes, connect the Discover appliance to each Explore node so that the Discover appliance can distribute the workload across the entire Explore cluster.

 **Note:** If the Explore appliance connections are managed from a Command appliance, you must perform this procedure from the Command appliance instead of from each Discover appliance.

1. Log into the Admin UI of the Discover or Command appliance.
2. In the ExtraHop Explore Settings section, click **Connect Explore Appliances**.
3. Click **Add New**.
4. In the Explore node field, type the hostname or IP address of any Explore appliance in the Explore cluster.
5. For each additional Explore appliance in the cluster, click **Add New** and enter the individual hostname or IP address in the corresponding Explore node field.

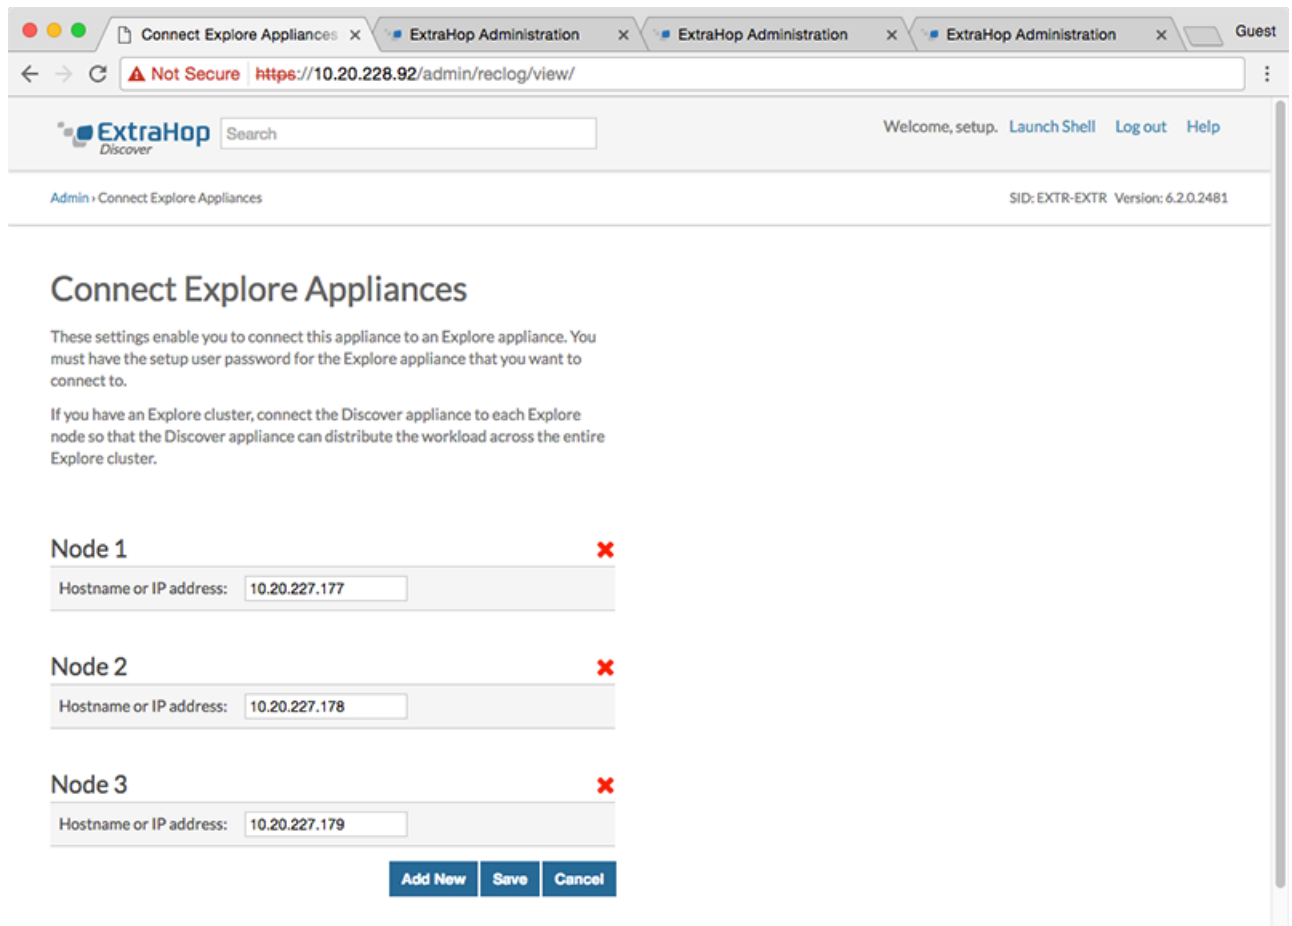

The screenshot shows the 'Connect Explore Appliances' configuration page in the ExtraHop Admin UI. The browser address bar shows the URL `https://10.20.228.92/admin/reconfig/view/`. The page header includes the ExtraHop logo, a search bar, and navigation links: 'Welcome, setup.', 'Launch Shell', 'Log out', and 'Help'. The breadcrumb trail is 'Admin > Connect Explore Appliances' and the version is 'SID: EXTR-EXTR Version: 6.2.0.2481'.

The main heading is 'Connect Explore Appliances'. Below it, there is explanatory text: 'These settings enable you to connect this appliance to an Explore appliance. You must have the setup user password for the Explore appliance that you want to connect to.' and 'If you have an Explore cluster, connect the Discover appliance to each Explore node so that the Discover appliance can distribute the workload across the entire Explore cluster.'


There are three nodes listed, each with a red 'X' icon indicating an error:

- Node 1**: Hostname or IP address:
- Node 2**: Hostname or IP address:
- Node 3**: Hostname or IP address:

At the bottom of the form, there are three buttons: 'Add New', 'Save', and 'Cancel'.

6. Click **Save**.
7. Confirm that the fingerprint on this page matches the fingerprint of Node 1 of the Explore cluster.
8. In the Explore Setup Password field, type the password for the Explore Node 1 `setup` user account and then click **Connect**.
9. When the Explore cluster settings are saved, click **Done**.

Next steps

-  **Important:** If you only deployed a single Explore appliance, after you connect to your Discover or Command appliance, you must log into the Admin UI on the Explore appliance and set the **Explore Cluster Settings > Data Management > Replication Level** to **0**.