

Alerts

Published: 2018-11-07

Alerts make it easy to inform your teams when critical network, device, or application events occur, such as Software License Agreement (SLA) violations. You can configure alert settings to track specified criteria and generate alerts when configured conditions are met.

When an alert is generated, you can also direct the ExtraHop system to send an email message or an SNMP trap to designated people in your organization. You can also configure time ranges in which alerts are suppressed, such as weekends, to reduce unnecessary alerts.

Alerts are displayed on the Alert History page, which enables you to quickly assess the severity of the alert and view the source of the alert.

Alert types

You can configure threshold and trend alert settings in the ExtraHop Web UI. The ExtraHop system also generates alerts from detections, which are available with an optional license.

Detection alerts

Detection alerts are generated when a detection for a specified source and protocol is identified. Detections are unexpected deviations from normal patterns in device or application behavior or notable activity in your environment. Detections are automatically identified by ExtraHop systems that are licensed for the Machine Learning Service. See [Detections](#) for more information.

Detection alerts are useful for filtering detections by protocol or source so that you can receive alerts that only apply to a subset of detections you want to view.

Threshold alerts

Threshold-based alerts are generated when a monitored metric crosses a defined value in a time period. You can specify a top-level or a detail metric as the threshold.

Threshold alerts are useful for monitoring occurrences such as error rates that surpass a comfortable percentage or SLA-violations.

Trend alerts

Trend-based alerts are generated when a monitored metric deviates from the normal trends observed by the system. Trend alerts are useful for monitoring metric trends such as unusually high round-trip times or storage servers experiencing abnormally low traffic, which might indicate a failed backup.

Trend alert settings are more complex than threshold alerts, and are useful for metrics where thresholds are difficult to define.

Alert conditions

An alert is generated when the alert conditions that you configure are met. The areas of consideration are different depending on the alert type. For detection alerts, the monitored protocols and the firing mode are considered. For threshold or trend alerts, the monitored metric, the firing mode, and the alert expression are considered.

Monitored protocols

Specifies which protocols are watched by the alert configuration. The ExtraHop system generates an alert only if a detection is identified from traffic that is over a specified protocol.

Monitored metric

Specifies the metric tracked by the alert configuration. The ExtraHop system watches for instances when the value of the metric crosses a defined threshold or diverges from the trend. Threshold

alert settings can track a top-level or detail metric, but trend alert settings can only track a top-level metric.

Firing mode

Specifies how often an alert is generated. Specify the edge-triggered alert option to issue a single alert when conditions are met even if the condition is ongoing. Specify a level-triggered alert option to issue alerts at specified intervals for as long as the conditions are true.

Alert expression

Specifies when to issue an alert. A series of options, such as the time interval, the metric value, and the rate, are combined to determine the alert expression. For example, you can set options to issue a threshold alert when the value of the monitored metric falls below 100 per second in a 1 minute interval. Options available for an alert expression vary by alert type and other configuration settings.

The values for each area are combined to determine the alert conditions; as the system monitors the specified metric, if the alerts conditions are met, the system issues an alert based on the specified firing mode and the alert type.

For example, the following alert conditions result in a threshold alert when an HTTP 500 status code is observed more than 100 times during a ten minute period:

- **Monitored metric:** `extrahop.device.http_server:status_code?500`
- **Firing mode:** **Edge-triggered**
- **Alert expression:** Value over **10 minutes > 100 per interval**

Or, you can specify a per second, minute, or hour rate. For example, the following alert conditions result in a threshold alert when an HTTP 500 status code is observed more than 30 times per minute during a 10 minute period:

- **Monitored metric:** `extrahop.device.http_server:status_code?500`
- **Firing mode:** **Edge-triggered**
- **Alert expression:** Value over **10 minutes > 30 per minute**

The alert conditions for a trend alert are slightly different than for a threshold alert. The following settings result in a trend alert when a spike (75th percentile) in HTTP web server processing time that lasts longer than 10 minutes, and where the metric value of the processing time is 100% higher than the trend:

- **Monitored metric:** `extrahop.device.http_server:tprocess`
- **Firing mode:** **Edge-triggered**
- **Alert expression:** **75th percentile over 10 minutes > 200 percent of trend**

Alert History

After you have configured settings for an alert or two, you can check out the Alert History page for any generated alerts. You can view all generated alerts on the Alert History page or you can view alerts generated from a specific source on an Alert History widget.

Alert History page

The Alert History page contains an entry for the most recent occurrence of each alert generated during the selected time interval.

Click to access Alert History

Filter alerts by search terms or by category

Click to view threshold alert details or navigate to the detection

Click to navigate to the alert source

The Alert History page displays the following information for each entry:

Severity

A color-coded indicator of the user-defined severity level of the alert. The severity levels are Emergency, Alert, Critical, Error, Warning, Notice, Info, and Debug.

Alert name

The name of the alert specified in the alert configuration settings.

For detection alerts, the name also includes the detection title. Click the alert name to view detection details from the Detections page.

For threshold alerts, click the alert name to open the Alert Details window and view additional information. For alerts that track top-level metrics, the Alert Details window is similar to the following image:

Alert description, if provided in the configuration.

Alert Details

Mar 6 15:06 **DNS Error Ratio - Orange**
 ● ERROR Alert triggered when ratio of DNS errors is greater than 1%.

Name of the metric tracked by the alert. Displays name of both tracked metrics if a ratio is configured.

Alert expression that specifies the conditions that generated the alert.

Visual representation of activity for the tracked metric in a 1-hour snapshot. Snapshot is not available on custom metrics.

Value of the tracked metric when the threshold was crossed. If a ratio is configured, displays the value of both metrics and the ratio. If the ratio is tracking custom metrics, displays only the ratio value.

Threshold value that was crossed to generate the alert.

Metric	Alert Value	Threshold
DNS Metrics Errors	1074	-
Responses	3134	-
Ratio	34.27%	0.01

Threshold alert on All Activity

Expression
 $((extrahop.application.dns:rsp_error / extrahop.application.dns:rsp) \text{ over } 30 \text{ sec}) > .01 \text{ (units: none)}$

For alerts that track detail metrics, the Alert Details window is similar to the following image:

Alert Details
✕

Mar 9 15:47 High Web Server Errors
● ERROR Alert triggered when the number of web server errors exceed 100 in 30 seconds.

Threshold alert on [Pet Store](#)

Expression
 ((extrahop.device.http_server_detail:rsp_error) over 30 sec) > 100 (units: period)

Type to filter...

IP Address	Host	Origin	Alert Value
10.10.30.4	sea.http123.example.com	—	485
10.10.40.4	sea.http133.example.com	—	1,655

┌──────────────────────────┐

└──────────────────────────┘

IP address and host of the device on which the alert occurred.

┌──────────┐

└──────────┘

Client IP information if there is a cross-origin request. Only available for HTTP metrics.

┌──────────┐

└──────────┘

Value of the tracked metric when the threshold was crossed.

Tip: To view trend alert details, click **Alert History Legacy Layout** in the left-hand pane, and then click on the trend alert name.

Source

The name of the data source on which the alert conditions occurred. Click the source name to navigate to the source and display the protocol page that correlates to the protocol of the alert metric.

For example, if an alert configuration tracks when the HTTP processing time exceeds a specific threshold, click the source link to go to the HTTP protocol page of the source device or application.

If an alert is associated with multiple protocols, the link goes to the Overview page for the source instead of the protocol page.

Time


The time of the most recent occurrence of the alert conditions.

Alert type

Indicates a trend, threshold, or detection alert.

Alert History widget

The Overview page for each application, device, and network displays an Alert History widget if any alerts were generated from that source during the selected time interval.

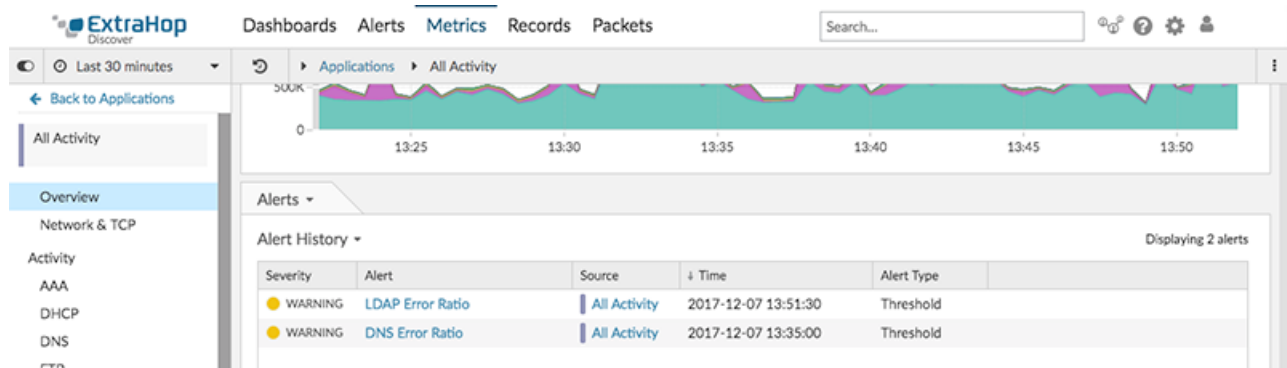

For example, if you have assigned an alert configuration to a device group, you can go to the Overview page for an individual device and see if any alerts are generated from the device during the selected time interval.

The Alert History widget provides the same alert information and links that are on the Alert History page, such as alert name, severity, type, and time.

Alert notifications

You can add notifications to an alert configuration, which enable you to review alerts with high priority severity settings through email or SNMP. When the alert is generated, notifications are emailed to specified addresses or sent to an SNMP listener.

The alert notifications contain information such as the severity level of the alert, the source, the alert conditions, and when the alerts was generated. For more information, see [Add a notification to an alert configuration](#).

Exclusion intervals

You can define a time in which alerts are suppressed through an exclusion interval. When an exclusion interval is assigned to an alert configuration, alerts will be suppressed from the Alert History, email notifications, and SNMP listener.

For example, an exclusion interval enables you to prevent recurring, duplicate alerts in the Alert History about high database activity during hours the database is backed up. For more information, see [Create an exclusion interval for alerts](#).

Related topics

Check out the following guides and resources that are designed to familiarize new users with our top features.

- [Configure detection alert settings](#)
- [Configure threshold alert settings](#)
- [Configure trend alert settings](#)
- [Alerts FAQ](#)
- [Intro to Alerts \(online training\)](#)
- [Configure your first alert \(online training\)](#)