

# Threat intelligence

Published: 2025-01-29

Threat intelligence provides known data about suspicious IP addresses, domains, hostnames, and URIs that can help identify risks to your organization.

▶ **View** the related training: [Threat Intelligence](#)

Threat intelligence data sets, called threat collections, contain lists of suspicious endpoints known as indicators of compromise (IOCs).

Participants that match a threat collection are tagged as Suspicious in detections, detection summaries, system charts, and records. (For CrowdStrike IOCs where the confidence level is High, the participant is tagged as Malicious.) Records that contain the suspicious entry are marked with a camera icon 📷. In many cases, an indicator match also generates a detection for the suspicious connection.

The screenshot displays a detection titled "SUNBURST C&C Activity" with a risk level of 94. The detection occurred on Dec 12 15:04 and lasted a few seconds. The offender IP is 34.223.124.45 (suspicious-example.com) and the victim is west.example. The detection summary panel shows 59 victims, including several IP addresses marked as SUSPICIOUS.

The Threat Intelligence breakdown in detection details shows two indicators:

- SUSPICIOUS** Threat Intelligence Indicator for suspicious-example.com
  - Type: SUNBURST Backdoor
  - Collection: ExtraHop Threat Intelligence
  - Producer: Malicious Host Names and URIs (I)
  - Producer: ExtraHop Networks
- MALICIOUS** Threat Intelligence Indicator for suspicious-example.com (CrowdStrike IOC label)
  - Indicator Type: Domain
  - Actor: StellarParticle
  - Confidence: High
  - Domain Type: C2Domain
  - Kill Chain: C2
  - Malware: CobaltStrike
  - Threat Type: Targeted

Labels in the image identify the "SUSPICIOUS" tag for threat intelligence IOCs, the "MALICIOUS" tag for High Confidence CrowdStrike IOCs, the "IOCs in detection type summary panel", and the "Threat intelligence breakdown in detection details".

## Threat collections

The ExtraHop system supports threat collections from several sources.

### Built-in threat collections

Curated threat collections from ExtraHop and CrowdStrike Falcon are available by default in your ExtraHop system. Built-in collections are updated every 6 hours. You can [enable or disable built-in threat collections](#) from the Threat Intelligence page.

### STIX file uploads

⚠ **Important:** STIX file uploads are now deprecated with an expected removal date of March 2025.

Free and commercial collections offered by the security community that are formatted in Structured Threat Information eXpression (STIX) as compressed TAR files, such as .TGZ or TAR.GZ, can be [uploaded manually](#) or [through the REST API](#) to ExtraHop systems. STIX version 1.0 - 1.2 are currently supported. You must upload each threat collection individually to your console and all connected sensors.

## TAXII feed

Threat collections can be delivered to your environment from a reliable source over the Trusted Automated Exchange of Intelligence Information (TAXII) protocol. A TAXII feed can provide a consistent stream of updated threat indicators. You can [add a TAXII feed](#) from the Threat Intelligence page.

Because cyber threat intelligence is community-driven, there are many external sources for threat collections. Data from these collections can vary in quality or relevance to your environment. To maintain accuracy and reduce noise, we recommend that you limit your STIX file uploads to high-quality threat intelligence data that focuses on a specific type of intrusion, such as one collection for malware and another collection for botnets. Similarly, we recommend that you limit TAXII feeds to reliable and high-quality sources.

## Investigating threats

After the RevealX system observes an indicator of compromise, the suspicious IP address, domain, hostname, or URI is marked as Suspicious or Malicious in detection summaries and on individual detection cards. In tables and charts, indicators of compromise are marked with a camera icon so you can investigate directly from the tables and charts you are viewing.

The screenshot illustrates the workflow for investigating threats. It starts with a table of flow records where a suspicious record is identified. Clicking the camera icon on this record leads to an 'OFFENDER' card for IP 26.237.235.96, which is marked as 'MALICIOUS'. From there, clicking another camera icon leads to a 'Threat Intelligence' card for IP 120.79.70.220, showing details like Title, Description, Type, Confidence, Collection, Producer, and Added date.

Click cameras, tags, or links to view IOC details

Time ↓	Record Type
2023-12-26 06:33:00.441	Flow
2023-12-26 06:33:00.441	Flow
2023-12-26 06:32:54.504	Flow

**OFFENDER**

26.237.235.96  
suspicious-example.com  
**MALICIOUS** External Endpoint

**Threat Intelligence**

ExtraHop Threat Intelligence

By [Malicious Host Names and URIs...](#)

**SUSPICIOUS** Threat Intelligence Indicator for 120.79.70.220


Title	IP: 71.142.193.46
Description	IP 59.50.146.248 reported from Threat Intel List
Type	IP Watchlist
Confidence	Medium
Collection	BitNodes Collection
Producer	Threat Intel List
Added	April 12, 2021 10:11 PM NDT

- If the threat collection is added or updated after the system has observed the suspicious activity, threat intelligence is not applied to that IP address, hostname, or URI until the suspicious activity occurs again.
- (RevealX 360 only) If a built-in ExtraHop or CrowdStrike threat collection is updated, the ExtraHop system performs Automated Retrospective Detection (ARD), which searches for new domains, hostnames, URLs, and IP addresses that are indicators of compromise in records for the past 7 days. If a match is found, the system generates a retrospective detection.
- If you disable or delete a threat collection, all indicators are removed from the related metrics and records in the system. Detections that are recommended for triage based on threat intelligence will remain in the system after the associated collection is disabled.

Here are some places in the RevealX system that show the indicators of compromise found in your threat collections:


### Security Hardening Dashboard

The **Threat Intelligence region** contains metrics for suspicious activity that matches the data in your threat collections. By clicking any metric, such as HTTP Requests with Suspicious Hosts, you can drill down on the metric for details or query records for related

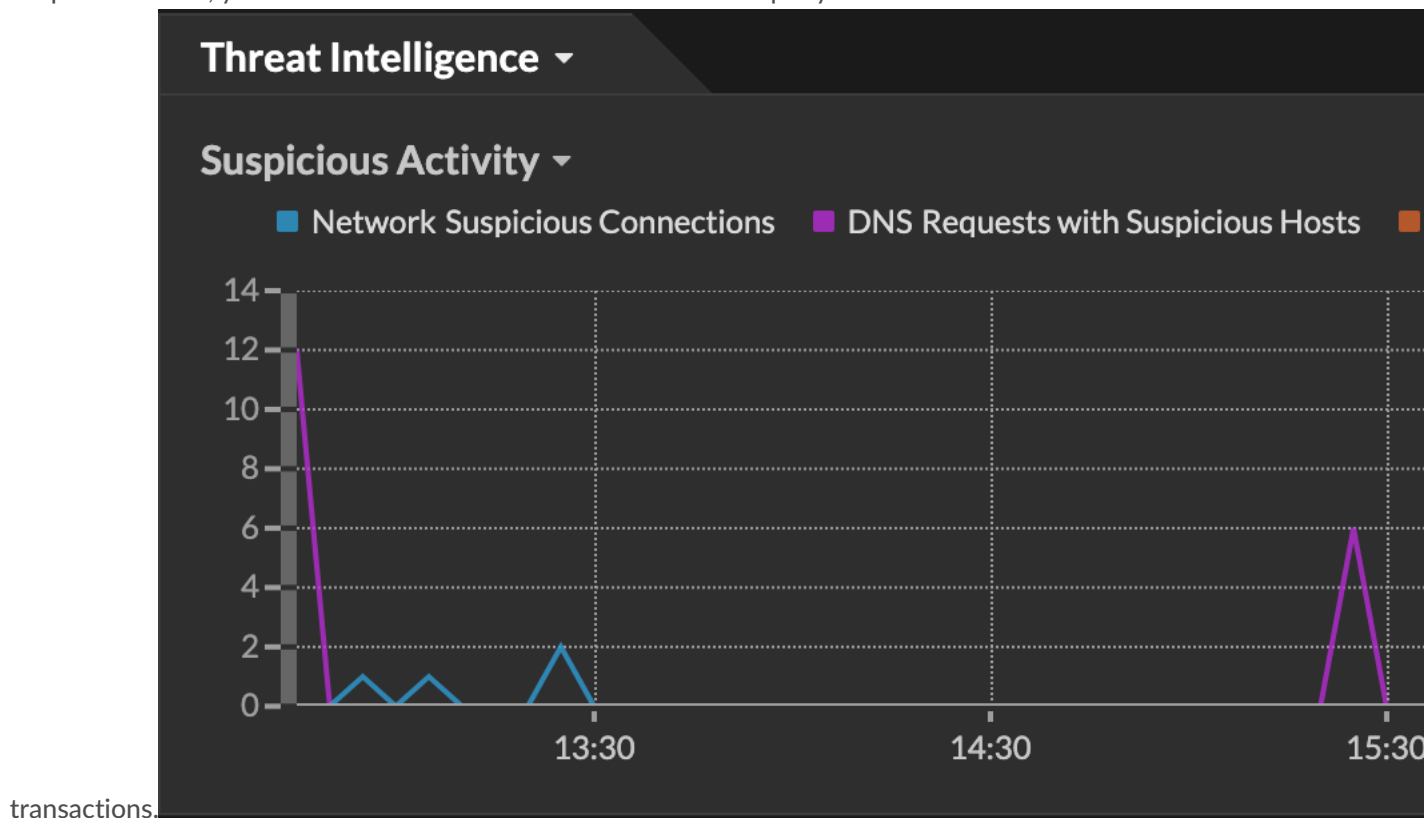

## Perimeter Overview

In the halo visualization, any endpoints that match threat collection entries are highlighted in red.

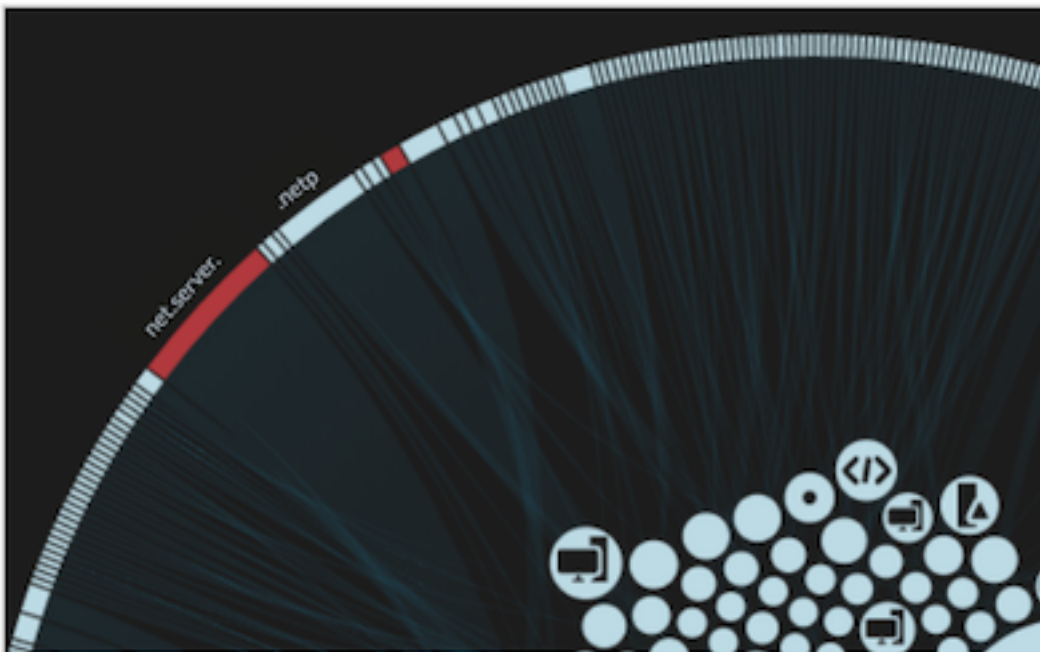

## Detections

A detection appears when an indicator of compromise from a threat collection is identified in network traffic.

94

RISK

### SUNBURST C&C Activity

COMMAND & CONTROL

Dec 12 15:04 • lasting a few seconds

west.example attempted to access a host associated with the backdoor known as SUNBURST or Solorigate, indicating command-and-control (C&C) activity. The SUNBURST backdoor affects SolarWinds Orion Platform versions 2019.4 through 2020.2 HF 1.

☠

**OFFENDER**

IP

34.223.124.45

suspicious-example.com

MALICIOUS

🎯

**VICTIM**

IP

west.example

10.4.15.49

Site: West 2

## IP Address Details

IP address detail pages display complete threat intelligence for IP address indicators of compromise.

### IP Address Details

External Endpoint  
Moondarra, Victoria, Australia


---


**SUSPICIOUS** Threat Intelligence Indicator for  
220.252.189.126


Title	IP: 38.236.216.22
Description	IP 119.74.30.120 reported from Threat Intel List
Type	IP Watchlist
Confidence	Medium
Collection	BitNodes Collection
Producer	Threat Intel List
Added	April 12, 2021 10:11 PM NDT

## Records

The Records page enables you to directly query for transactions that match threat collection entries.

- Under the Suspicious facet, click **True** to filter for all records with transactions that match suspicious IP addresses, hostnames, and URIs.
- Create a filter by selecting Suspicious, Suspicious IP, Suspicious Domain, or Suspicious URI from the trifield drop-down menu, an operator, and a value.
- Click the red camera icon  to view threat intelligence. When the camera icon is gray, the record includes an endpoint that was listed in a threat collection when the record was created, but is no longer considered suspicious. The field that matches the threat intelligence is underlined in red.

 **Note:** If there is no camera icon next to a record, but the record contains an endpoint that is underlined in red, the endpoint was found in a threat collection after the record was created.

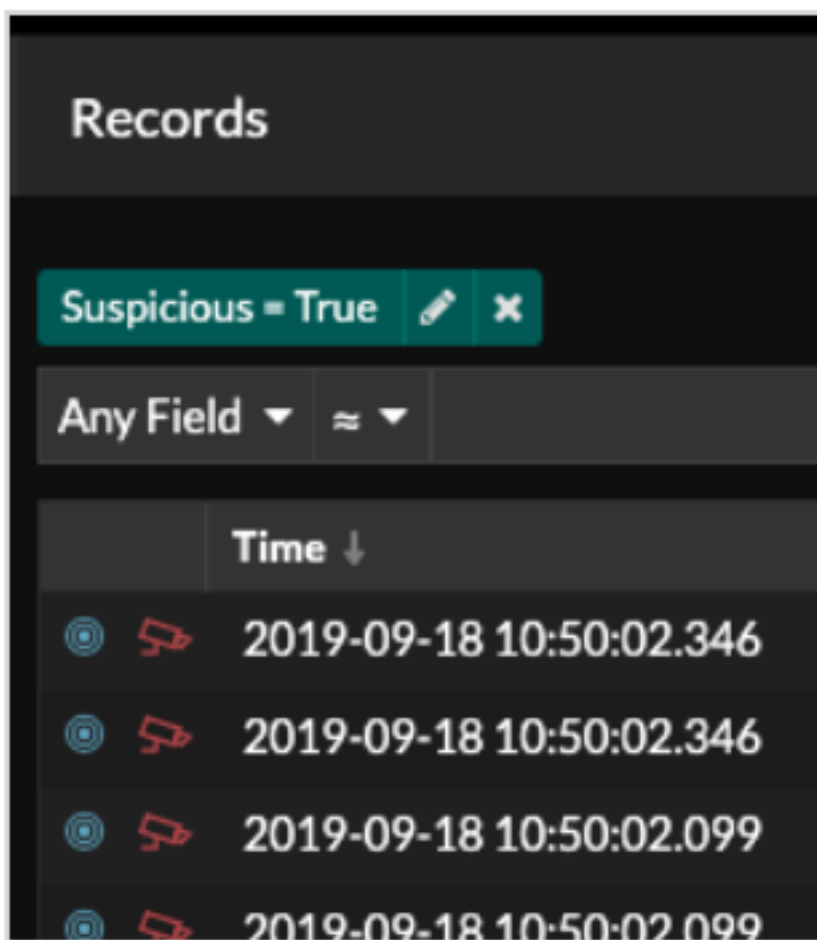

## Retrospective detections

(RevealX 360 only) When an ExtraHop or CrowdStrike threat collection is updated, the ExtraHop system performs Automated Retrospective Detection (ARD), which searches for new domains, hostnames, URLs, and IP addresses that are indicators of compromise in records for the past 7 days. If a past connection to a suspicious domain is identified, the system generates a retrospective detection.

The timestamp on a retrospective detection indicates the time that the activity originally occurred and might not appear in the current detection list. You can find retrospective detections by clicking on the Retrospective Threat Intelligence [threat briefing](#). You can also [create a detection notification rule](#) to email you when these types of detections occur.