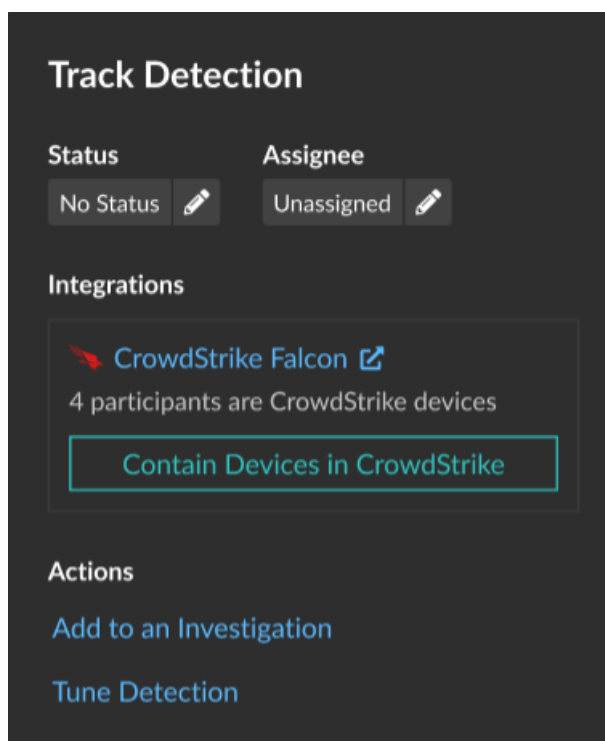# Contain CrowdStrike devices from a detection

Published: 2025-03-31

You can initiate containment of CrowdStrike devices that are participants in a security detection. Containment prevents devices from establishing connections to other devices on your network.

After you initiate containment from a detection, a request is made to CrowdStrike Falcon to contain the devices and a Containment Pending status appears next to the participant. The status is updated to Contained only after the ExtraHop system receives a response from CrowdStrike.

Before you begin

- Device containment must be enabled for the CrowdStrike integration ↗.
- Users must be granted NDR module access and have full write privileges ↗ or higher to complete the tasks in this guide.

1. Log in to the ExtraHop system through https://<extrahop-hostname-or-IP-address>.
2. At the top of the page, click **Detections**.
3. Click a detection title to view the detection detail page.
   The number of CrowdStrike devices that are participants in the detection appear in the Integrations section under Track Detection.


4. Click **Contain Devices in CrowdStrike**.
   The dialog box displays the CrowdStrike devices associated with the detection.
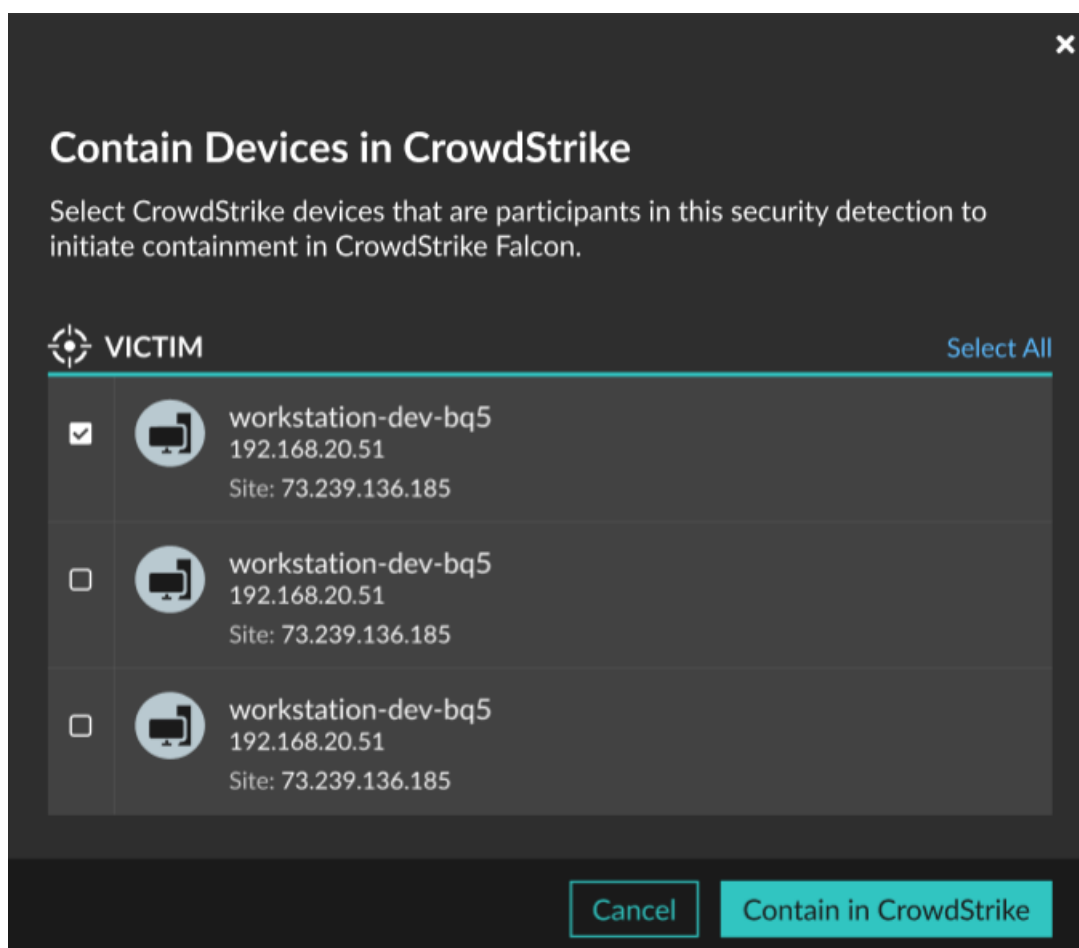
5. Select the devices you want to contain and click **Contain in CrowdStrike**.
    A request is sent to CrowdStrike and the Containment Pending status appears next to each selected participant.

Next steps

*   Verify device containment by checking the status from the detection details. The containment status also appears in the device properties ↗.
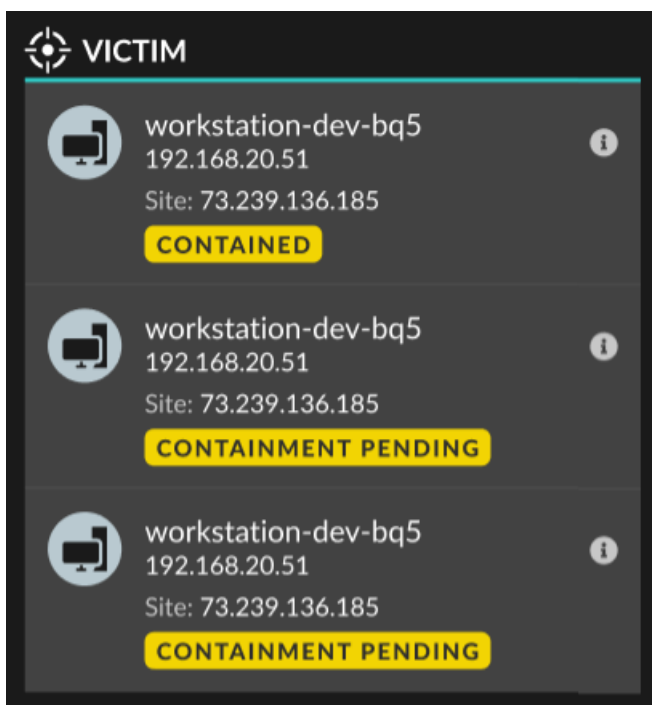
- Retry containing a device. The Containment Pending status no longer appears when a containment request to CrowdStrike is denied or expires.
- Release a device from containment from the CrowdStrike Falcon console. From the Integrations section under Track Detection, click **CrowdStrike Falcon** to open the console in a new tab. The containment status no longer appears after the ExtraHop system receives a response from CrowdStrike.